


REV. 1 7/9/92

COIL: @ +25° C	
RESISTANCE	675 OHMS ± 10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	1.5 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	100 g's 6 ± 1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: _____

CUSTOMER DATA SHEET

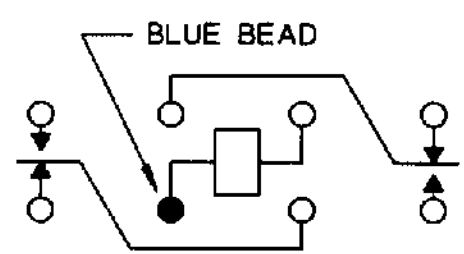

CONTACT RATING:	2 AMPS 30 VDC
	RESISTIVE 1 AMP 30 VDC INDUCTIVE
	100,000 OPERATIONS

DR. R.B. 7/9/92 CK. 7/9/92 RBS



CUST. HI-G
 CUST. NO. 2B-1B-126

TYPE "FW" RELAY

FW1193G01